



F. Ball and Co. Ltd.


[PRODUCT PROFILE]

isolator range

a systemized solution to problem subfloors



For damp, contaminated and protected subfloors.

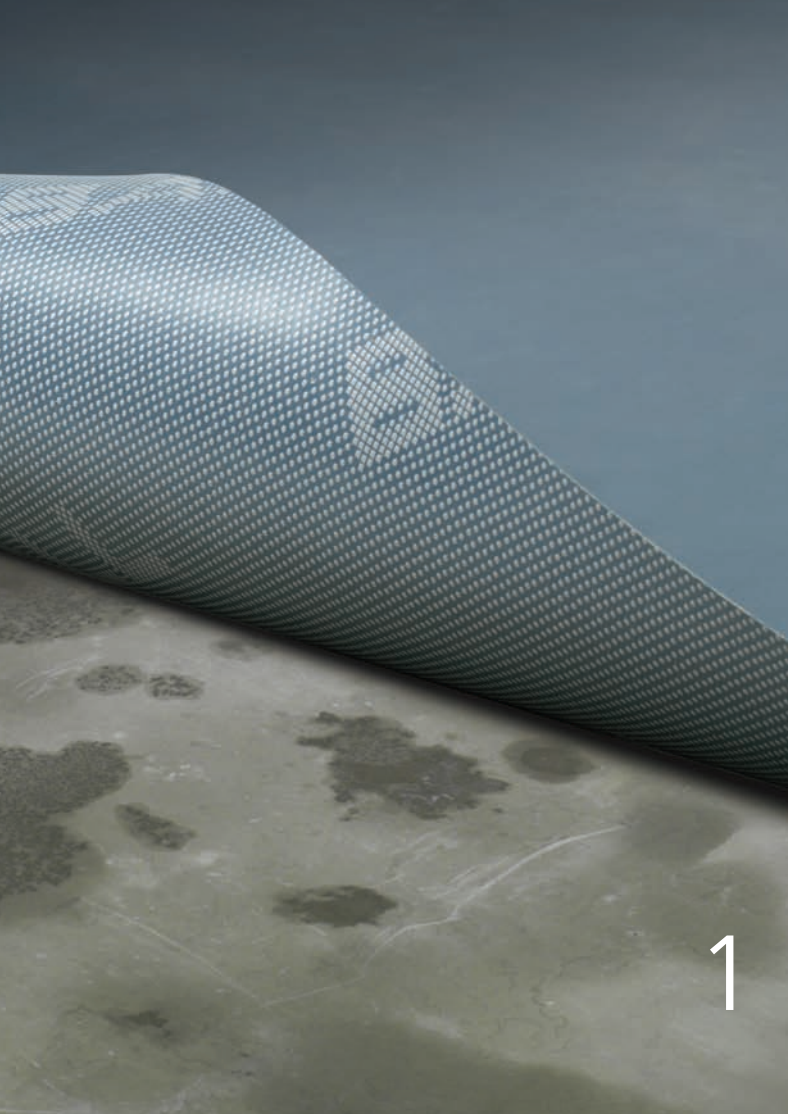

isolator range

F. Ball's Stopgap Isolator range gives a complete systemized solution to damp and contaminated subfloors and refurbishment projects where the original floor must be protected. The comprehensive product range ensures quick and easy solutions to situations that would otherwise require lengthy and expensive remedial work.

Isolator Membrane

1

- Impervious laminated sheet for use over damp surfaces, oil and paint contaminated subfloors and some existing resilient floorcoverings
- Loose lay system available in 2 x 20 metre long rolls
- Nodules on underside to ventilate water vapour from subfloor into dry wall
- As easy to remove as it is to lay leaving floor surface in its original condition

Isolator Jointing Tape

2

- Thin impervious metallised jointing tape
- For use along the seams of the Isolator Membrane
- Ensures extra stability to the installation
- Provides additional protection in damp areas

Styccobond F47 Pressure Sensitive Isolator Membrane Adhesive

3

- Water-based pressure sensitive adhesive for use with sheet vinyl floorcoverings
- For use on subfloors with a relative humidity of up to 92%
- Easy to work with and helps eliminate the risk of late placement
- For use in conjunction with Isolator Jointing Tape

Styccobond F84 Isolator Membrane Adhesive

4

- High performance two-part adhesive
- For subfloors with a relative humidity over 92%
- Suitable for more demanding floorcoverings such as rubber and linoleum
- Highly resistant to water, oil and grease when cured

case studies

F. Ball and Co. Ltd.

Churnetside Business Park, Station Road,
Cheddleton, Leek, Staffordshire ST13 7RS.

Tel: +44 (0) 1538 361633 Fax: +44 (0) 1538 361622

E-mail: marketing@f-ball.co.uk

Internet: www.f-ball.co.uk

[PRODUCT PROFILE]


Harrow Church Building



The Stoppag Isolator System was employed when low winter temperatures meant an extended drying out period for a newly laid sand/cement screed in a refurbished church hall. Use of the Isolator membrane, jointing tape and Styccobond F47

adhesive facilitated the rapid return to use of the building by enabling the flooring installation to be completed in 1½ days. This is in contrast to the 4-5 days a traditional two-coat liquid surface membrane and re-screeding would have required.

Warwick Hospital

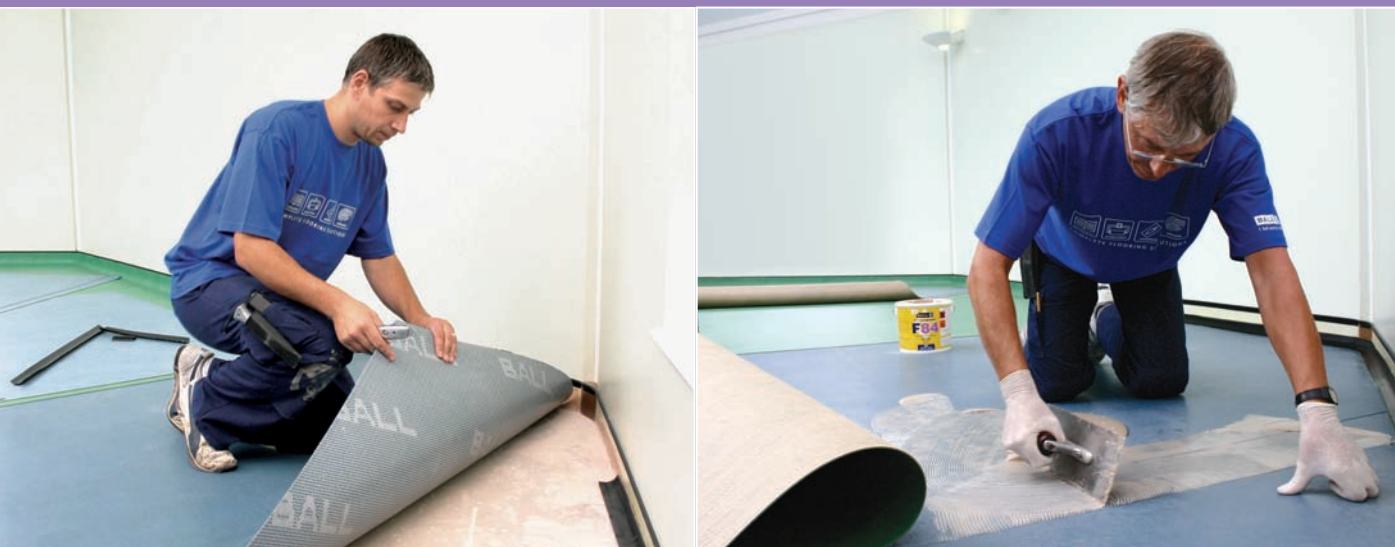

The Isolator system also dramatically reduced floorcovering installation time at Warwick Hospital where contractors were faced not only with a damp subfloor but also pressure to keep the job running. With the damp safely isolated by

the membrane, specialist anti-bacterial linoleum was then bonded to it using Styccobond F84 all in sufficient time to meet the tight deadline.

Technical and Material Safety Data Sheets can be downloaded from www.f-ball.co.uk